

GreenConnect Battery-Powered Companion Switch and Dimmer



ZBK00-CSW


ZBK00-CDW

Description

GreenConnect delivers simple wireless lighting control by adding wireless control to virtually any switching or dimming load. Compatible with various lamp fixtures and load control devices, GreenConnect offers a scalable and flexible wireless solution to meet the control needs of virtually any space. No new wiring, room controller, hub or commissioning required. Ideal for retrofits and new construction.

The GreenConnect Battery-Powered Companion Switch and Dimmer pair wirelessly with a GreenConnect load controller to provide a simple to install solution for wireless manual lighting control. The Companion Switch and Dimmer can be mounted directly onto a wall surface, or into a single, or multi-gang device wall box, no wiring required, using the included screws, or double-sided tape. The Companion Switch and Dimmer are the perfect solutions for locations where installing a new device, wallbox, or wiring is difficult or cost-prohibitive.


User Interfaces

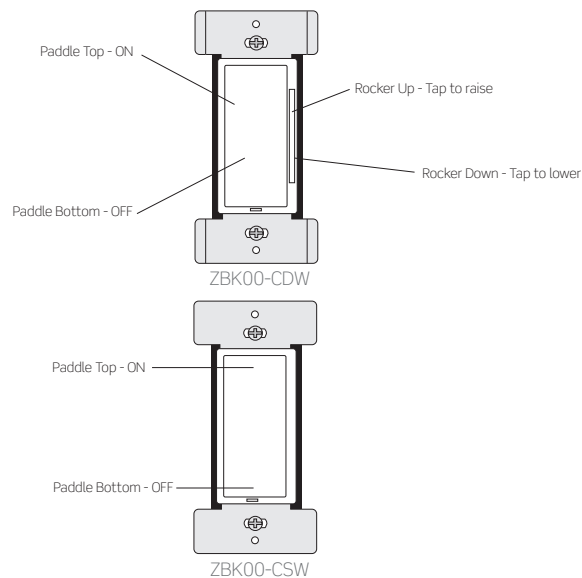

Features

- True wireless, multi-way switching or dimming when paired with a GreenConnect load controller, dimmer, or switch
- LED indicators for light level and locating in a dark room
- Mounts directly to the wall surface or into a single or multi-gang wall-box
- Wireless range of 50ft
- Classic Decora® rocker with dimming bar for simple ON/OFF and raise/lower control
- Use with single or multi-gang Decora® wall-plates
- Easy to replace CR2025 batteries with an estimated battery life of five years
- Complies with IEEE 802.15.4 standards for domestic and international wireless networks
- Code compliant energy management functionality— can be used as a component in a system to meet code requirements for IECC, ASHRAE 90.1, and 2025 Title 24, Part 6 space/are control, dimming, manual-ON/OFF, occupancy/vacancy control and automatic shutoff requirements

Installation Diagram

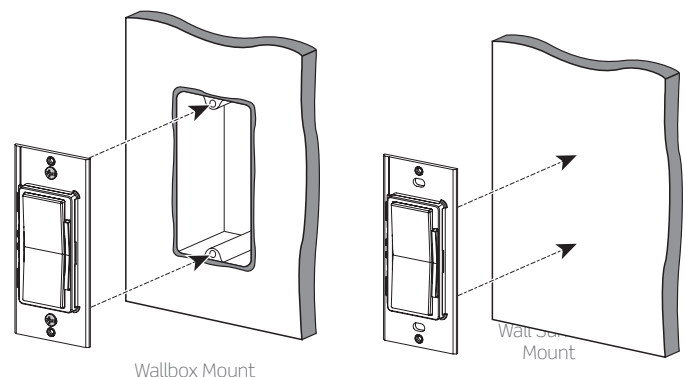


Leviton Manufacturing Co., Inc. Lighting & Controls

10385 SW Avery Street, Tualatin, OR 97062 **tel** 800-736-6682 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

©2025 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Dimensions Diagram

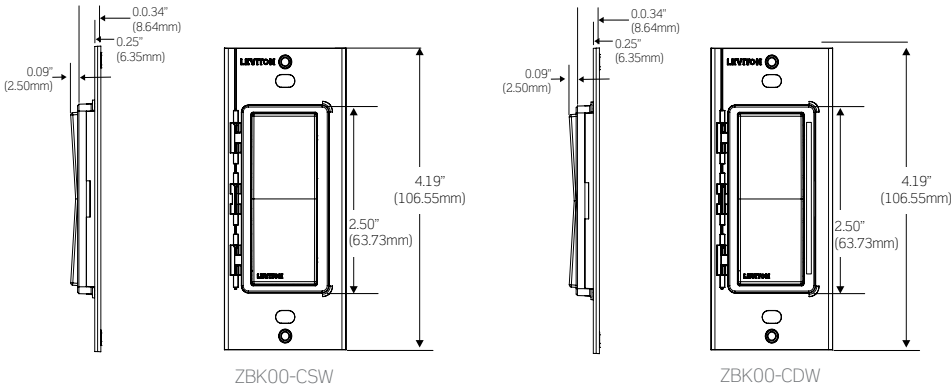

Specifications

Electrical	
Batteries	CR2025 x2.3V
Battery Life	5 years
Wireless	
Network	2.4GHz
Range	50 ft
Environmental	
Operating Temperature	32° to 104° F (0° to 40° C)
Storage Temperature Range	14° to 185° F (-10° to 85° C)
Relative Humidity	0-90% non-condensing
Other	
Energy Codes	Can be used as a component in a system to meet energy code requirements for IECC, ASHRAE 90.1, and 2025 Title 24, Part 6 space/area control, dimming, manual-ON/OFF, occupancy control and automatic shutoff requirements
IP Rating	IP10
Listings	UL 1472, CSA C22.2 No. 184.1-15, FCC Part 15, Class B
Weight	0.15lbs (0.07kg)
Warranty	5-Year

Ordering Information

GreenConnect Battery-Powered Companion Switch & Dimmer	
Cat. No.	Description
ZBK00-CSW	GreenConnect Battery-Powered Companion Switch, Battery Powered, White
ZBK00-CDW	GreenConnect Battery-Powered Companion Dimmer, Battery Powered, White

Leviton Manufacturing Co., Inc. Lighting & Controls
10385 SW Avery Street, Tualatin, OR 97062 tel 800-736-6682 tech line (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters
201 North Service Road, Melville, NY 11747-3138 tel 800-323-8920 tech line (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun) 800-824-3005

Visit our Website at: www.leviton.com/greenconnect
©2025 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.