

# Provolt™ Series Vacancy Sensors



## DESCRIPTION

The Leviton Provolt™ Series combines line voltage vacancy sensors into a self-contained unit. The integrated design alleviates the need for separate power pack and vacancy sensor wiring making it a low-cost, efficient energy solution for new construction and retrofits. Vacancy timers continually analyze and adjust to changing conditions using the latest microprocessor-based technology to optimize performance. Manual-ON/ auto-OFF requires lights to be manually turned ON and will automatically turn lights OFF when no occupancy is detected. Wire terminals allow for simple connection to a line-voltage circuit and are ideal for existing buildings with limited access to wiring and new construction.

## APPLICATIONS

- Can be used to comply with 2016 Title 24, Part 6 vacancy sensing requirements
- Manual-ON/auto-OFF

## FEATURES

- Auto-adapting: time delay and sensitivity are continually adjusted to occupancy pattern of use
- Configurable for manual-ON/auto-OFF
- Vacancy sensing time outs:
  - Delayed OFF timer: the sensor will turn lights OFF if no motion is detected after a specified time
  - Exclusive walk-through feature: provides increased energy savings by not leaving the lights ON for an extended period after only momentary occupancy
  - False detection timer: (PIR) the PIR scans for movement and shuts lights off after 31 minutes preventing false triggers from HVAC systems

- Time delay and saved settings are protected during power outages and will return to the last known state
- Output short circuit protection
- Industry-exclusive self-configuring local manual switch input: momentary or maintained switches are supported
- Adjustable time delay: 30s, 5min, 10min, 20min, 30min
- Test mode for simplified commissioning
- Manual switch and emergency override are Class 1 or Class 2 circuits. Class 2 circuits provided for flexibility.
- Industry-exclusive “fail-safe” circuitry: in the event of product failure, return-to-closed feature causes the relay to default ON which eliminates life safety concerns
- Industry-exclusive H.I.S. (High Inrush Stability) technology designed to handle today’s high inrush electronic ballast loads and offer un-matched durability and service
- Robust and reliable mechanically held 8A latching relay provides dependability and robust performance for all load types and provides energy savings over electronically held relays
- Field of view: units from 1,000 to 2,000 square feet available
- Lenses on PIR models are easily replaceable and color-coded red (mid range) for contractors and end-users to easily identify lenses from the ground



## Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 tech line 800-824-3005 fax 800-832-9538  
 ©2017 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

## PRODUCT DATA

### FEATURES

- Industry-exclusive H.I.S. (High Inrush Stability) technology designed to handle today's high inrush electronic ballast loads and offer unmatched durability and service
- Robust and reliable mechanically held 8A latching relay provides dependability and robust performance for all load types and provides energy savings over electronically held relays
- Field of view: units from 1,000 to 2,000 square feet available
- Lenses on PIR models are easily replaceable and color-coded red (mid range) for contractors and end-users to easily identify lenses from the ground:
- - Mid-Range—Red included with M/T, and PIR models
- - Extended Range—Black


### RATINGS AND TESTING

- Zero-crossing circuitry for extended life of the relay
- Tested to exceed 1 million switching cycles under standard loads
- Multiple compliance and regulatory UL testing—consult factory for details
- Passed rigorous NEMA 410 testing for electronic ballast rating
- BMS Input/Emergency Override: UL 924 listed for emergency and egress lighting control


### INSTALLATION

- Easy installation into junction boxes with Leviton-exclusive screw guides, coasters and terminal blocks
- Front cover snaps on and off for ease of installation

### DIMENSIONS

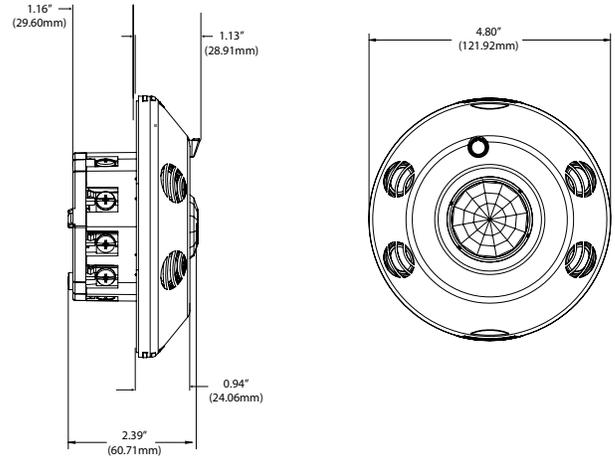


### INSTALLATION

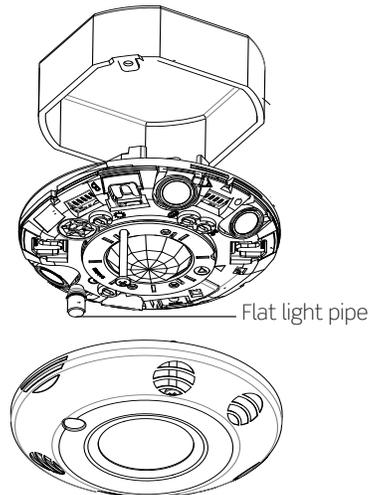

Sensors conveniently mount to a standard 4" x 4" octagon electrical box per NEC standards.

### FIELD OF VIEWS

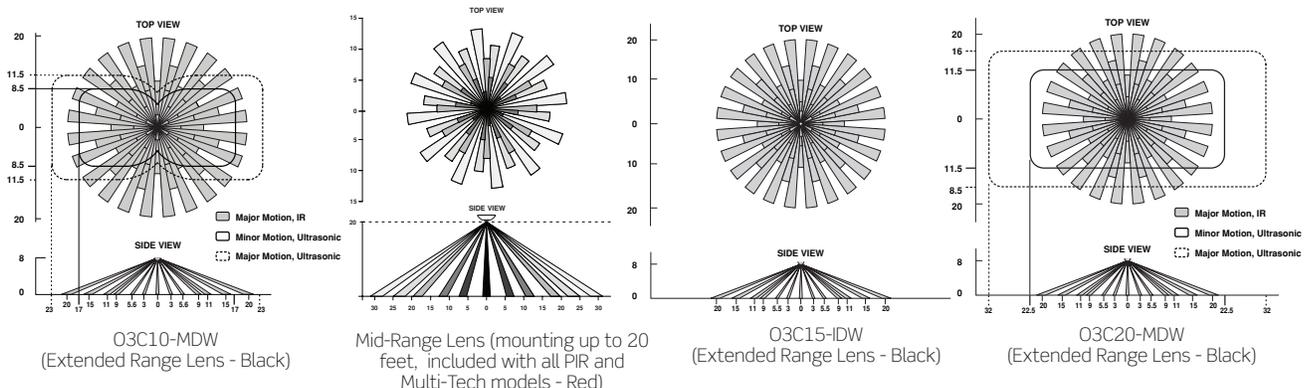

## PRODUCT DATA



### SPECIFICATIONS

ELECTRICAL			
Input Voltage	120V, 50/60Hz	230V, 50Hz	277V, 50/60Hz
Load Rating	8A, Electronic Ballast, 800W/VA, Tungsten, Ballast, 1/4 HP Motor	6A/6AX, Electronic Ballast, Magnetic Ballast, 1/3 HP Motor	5A, Electronic Ballast, 1200VA, 1/3 HP Motor
Current Consumption	60-30ma		
ENVIRONMENTAL			
Operating Temperature	32-104° F (0-40° C)		
Storage Temperature	-15-160° F (-26-71° C)		
Relative Humidity	0-90% non-condensing		
OTHER			
Listings	Can be used to comply with 2016 Title 24, Part 6 vacancy sensing requirements, UL 773A (Occupancy Standard), UL 924 (Emergency Equipment), cUL listed, CE compliant, NOM certified, RoHS compliant, NY LLC48 compliant		
Warranty	5-Year Limited Warranty		

### ORDERING INFORMATION

CAT. NO.	DESCRIPTION
03C10-MDW	Line Voltage, Ceiling, M/T Vacancy Sensor 1,000sqft, 120-277V, meets energy code requirements for CA Title 24 and NY LLC48
03C15-IDW	Line Voltage, Ceiling, PIR Vacancy Sensor 1,500sqft, 120-277V, meets energy code requirements for CA Title 24 and NY LLC48
03C20-MDW	Line Voltage, Ceiling, M/T Vacancy Sensor 2,000sqft, 120-277V, meets energy code requirements for CA Title 24 and NY LLC48

Provolt™ Series Vacancy Sensors

#### Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 tech line 800-824-3005 fax 800-832-9538

©2017 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

## PRODUCT DATA

Provolt™ Series Vacancy Sensors

### **Leviton Manufacturing Co., Inc. Global Headquarters**

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **fax** 800-832-9538 **tech line** (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

### **Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation**

20497 SW Teton Avenue, Tualatin, OR 97062 **tel** 800-736-6682 **fax** 503-404-5594 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

### **Visit our Website at: [www.leviton.com/provolt](http://www.leviton.com/provolt)**

©2017 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-9128B/L17-aa  
REV DEC 2017